

TILT BEAM IMAGINGWHEEL ALIGNMENT SYSTEM



FAST COMPENSATION AND OPTIMISED ALIGNMENT FLOW

Enhance productivity and cut down on unnecessary steps with an intelligent, predictive alignment workflow that simplifies the alignment process.



ADVANCED NOTIFICATION SYSTEM

The advanced notification system provides critical information without slowing down the alignment process, automatically detecting and compensating suspension stress issues or environmental errors, only notifying the technician when necessary to provide additional information for corrective action.



REMOTE CONTROLLED TILT BEAM

A simple remote control allows technicians to tilt the beam quickly and easily.




™ותחע

Our exclusive Vehicle Orientation Directional Indicator (VODI™) guides technicians through the measurement process when the monitor is not in view, with simple, easy-to-follow red and green LED lighting; reducing the amount of time spent walking back and forth from the vehicle to the aligner.



V2100

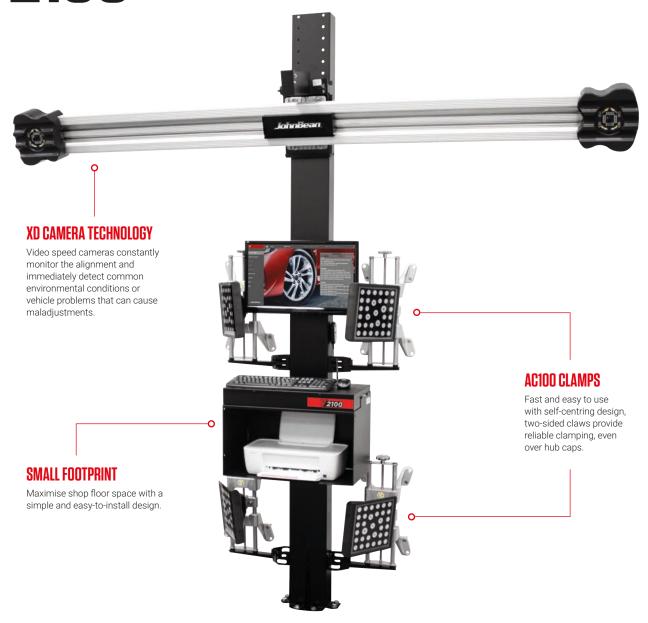

TECHNICAL SPECIFICATIONS

Wheel Diameter (AC100)	11"-22" 28-56cm
Track Width	48"-96" 122-244cm
Wheelbase	79"-180" 201-457cm
Power Supply	110-240V 50/60Hz

STANDARD ACCESSORIES

- · AC100 Wheel Clamps
- 2x Wheel Chock
- Steering Wheel Holder
- · Brake Pedal Depressor
- Printer

OPTIONAL ACCESSORIES

- 4" Extension Kit
- 2" Wheel Hub Extension







